


INSTALLATION PLAN -

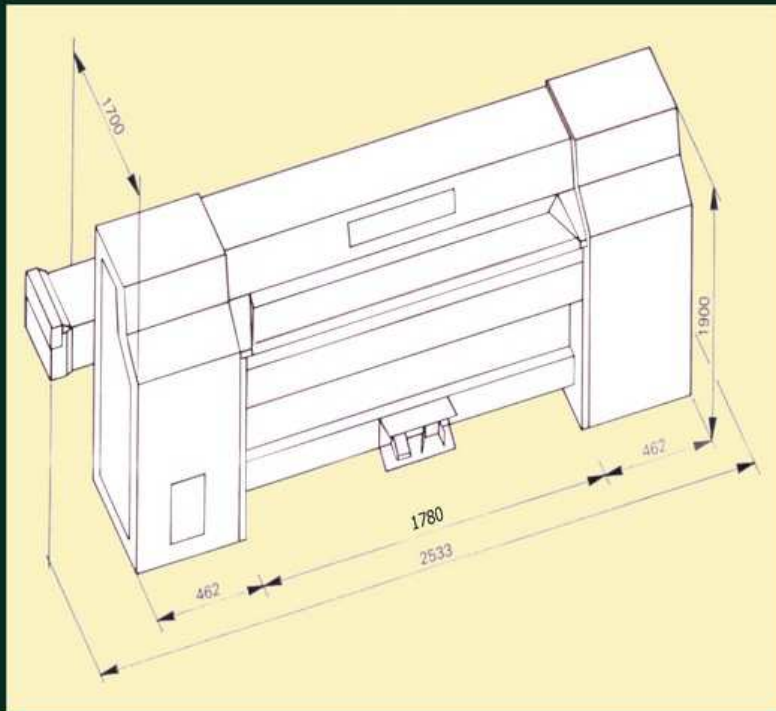

# TURNER

HIGH QUALITY MACHINERY AND SPARE PARTS  
FOR THE LEATHER INDUSTRY

## DOLRAY


干式削匀机  
DRY SHAVING MACHINE

应用

山羊皮  
绵羊皮  
小牛皮

Applications

Goat skins  
Sheep skins  
Calf skins

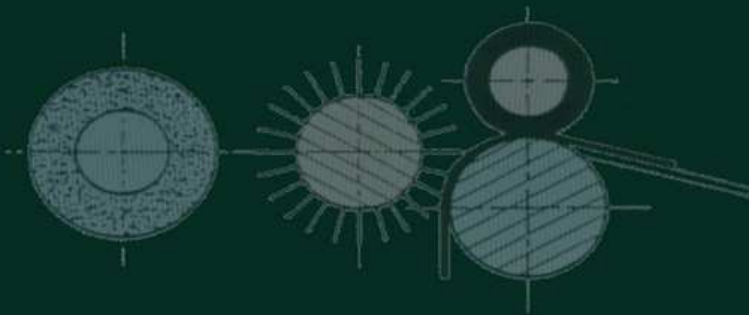

# TURNER

32 Avenue Daniel Mercier  
07100 Annonay - FRANCE  
Tel: +33 475 670 500 / Fax: +33 475 676 526  
sales@turner-sas.fr / spareparts@turner-sas.fr  
www.turner.fr



**HIGH PRECISION**

# D O L B R A Y

## PATENTED MACHINE



1500mm

Workwidth / 工作宽度	1 500mm
Total power / 总能耗	36 kw
Power bladed roller / 刀辊能耗	22 kw
Hourly output / 每小时产量	180-240
Feed-in speed / 进皮速度	5 - 18 m/mn
Net weight / 净重	4 200 kg
Export crating / 出口包装体积	13 m3



21 + 21  
or  
18 + 18




### 结构

铸铁闭式机座紧凑耐用, 在工作时不会振动, 因而可以确保削匀精度非常高。

### Framework

Very high precision compact and sturdy machine thanks to its closed frames in iron cast, insuring a perfect rigidity free of vibrations.

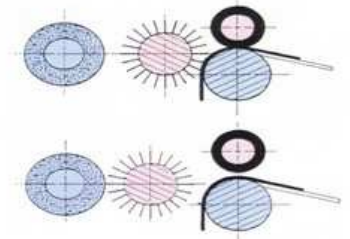

### 刀辊

仅有的, 刀辊可移动的削匀机。托辊在一个固定的位置上将皮送进机器后, 刀辊前移并进行削匀工作。这一过程中, 刀辊不会对皮革产生挤压力, 因而削匀更加柔和, 精度更高。

### Bladed roller

The only machine with a mobile bladed roller. The skin is introduced into the machine by the carrier roller which remains in a fixed position and the bladed roller moves toward the front to work the skin without compressing it. The shaving is thus much more precise and the mechanical action much softer.



### 磨刀

自动校正系统, 根据削匀刀和砂轮的磨损情况自动调整刀辊的位置; 微处理器始终控制砂轮架的位置, 从而确保始终把皮削匀到预设的厚度。

### Grinding

Automatic system of wear correcting of the blades depending on their wear and the wear of the own grinding wheel. The position of the support is permanently controlled by microprocessor acting on micrometric screws so as to maintain the pre-selected thickness of the leather.

